

**• General Description**



The ZM027N03F combines advanced trench MOSFET technology with a low resistance package to provide extremely low $R_{DS(ON)}$. This device is ideal for load switch and battery protection applications.

• Features

- Advance high cell density Trench technology
- Low $R_{DS(ON)}$ to minimize conductive loss
- Low Gate Charge for fast switching
- Low Thermal resistance

• Application

- MB/VGA Vcore
- SMPS 2nd Synchronous Rectifier
- POL application
- BLDC Motor driver

• Product Summary $V_{DS} = 30V$ $R_{DS(ON)} = 2.7m\Omega$ $I_D = 80A$ 

TO-220F

• Ordering Information:

Part NO.	ZM027N03F
Marking	ZM027N03
Packing Information	Bulk Tube
Basic ordering unit (pcs)	1000

• Absolute Maximum Ratings ($T_c = 25^\circ C$)

Parameter	Symbol	Rating	Unit
Drain-Source Voltage	V_{DS}	30	V
Gate-Source Voltage	V_{GS}	± 20	V
Continuous Drain Current	$I_D @ T_c = 25^\circ C$	80	A
	$I_D @ T_c = 75^\circ C$	61	A
	$I_D @ T_c = 100^\circ C$	50	A
Pulsed Drain Current ^①	I_{DM}	210	A
Total Power Dissipation($T_c = 25^\circ C$)	$P_D @ T_c = 25^\circ C$	120	W
Total Power Dissipation($T_A = 25^\circ C$)	$P_D @ T_A = 25^\circ C$	2	W
Operating Junction Temperature	T_J	-55 to 150	$^\circ C$
Storage Temperature	T_{STG}	-55 to 150	$^\circ C$
Single Pulse Avalanche Energy	E_{AS}	180	mJ
Avalanche Current	I_{AS}, I_{AR}	60	A

**•Thermal resistance**

Parameter	Symbol	Min.	Typ.	Max.	Unit
Thermal resistance, junction - case	R _{thJC}	-	-	1.1	° C/W
Thermal resistance, junction - ambient	R _{thJA}	-	-	62	° C/W
Soldering temperature, wave soldering for 10s	T _{sold}	-	-	265	° C

•Electronic Characteristics

Parameter	Symbol	Condition	Min.	Typ	Max.	Unit
Drain-Source Breakdown Voltage	BV _{DSS}	V _{GS} =0V, I _D =250uA	30			V
Gate Threshold Voltage	V _{GS(TH)}	V _{GS} =V _{DS} , I _D =250uA	1.2		2.5	V
Drain-Source Leakage Current	I _{DSS}	V _{DS} =30V, V _{GS} =0V			1.0	uA
Gate- Source Leakage Current	I _{GSS}	V _{GS} =±20V ,V _{DS} =0V			±100	nA
Static Drain-source On Resistance	R _{DS(ON)}	V _{GS} =10V, I _D =24A		2.7	3.6	mΩ
		V _{GS} =4.5V, I _D =12A		4.1	5.5	mΩ
Forward Transconductance	g _{FS}	V _{DS} =25V, I _D =10A		30		s
Source-drain voltage	V _{SD}	I _S =24A			1.28	V

•Electronic Characteristics

Parameter	Symbol	Condition	Min.	Typ	Max.	Unit
Input capacitance	C _{iss}	V _{DS} =25V f = 1MHz	-	2800	-	pF
Output capacitance	C _{oss}		-	420	-	
Reverse transfer capacitance	C _{rss}		-	280	-	

•Gate Charge characteristics(T_A = 25°C)

Parameter	Symbol	Condition	Min.	Typ	Max.	Unit
Total gate charge	Q _g	V _{DD} =15V ID = 24A V _{GS} = 10V	-	27	-	nC
Gate - Source charge	Q _{gs}		-	8.6	-	
Gate - Drain charge	Q _{gd}		-	13.8	-	

Note: ① Pulse Test : Pulse width ≤ 300μs, Duty cycle ≤ 2% ;



Fig.1 Power Dissipation

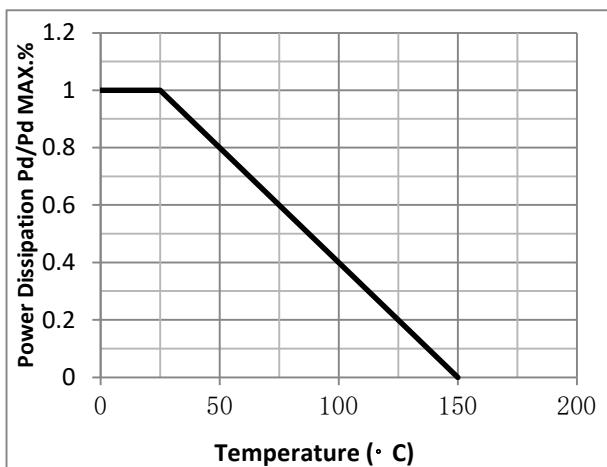


Fig.2 Typical output Characteristics

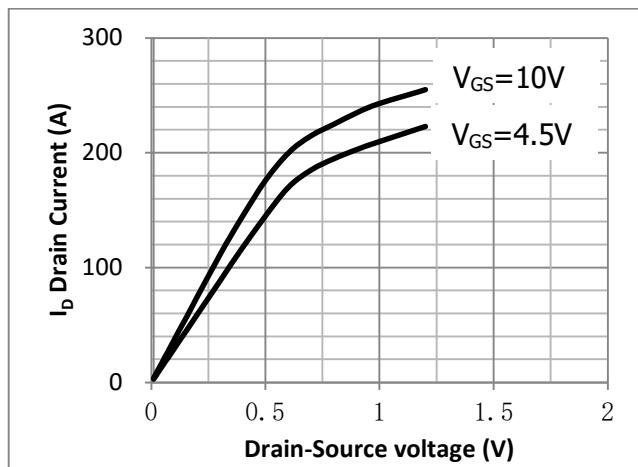


Fig.3 Threshold Voltage V.S Junction Temperature

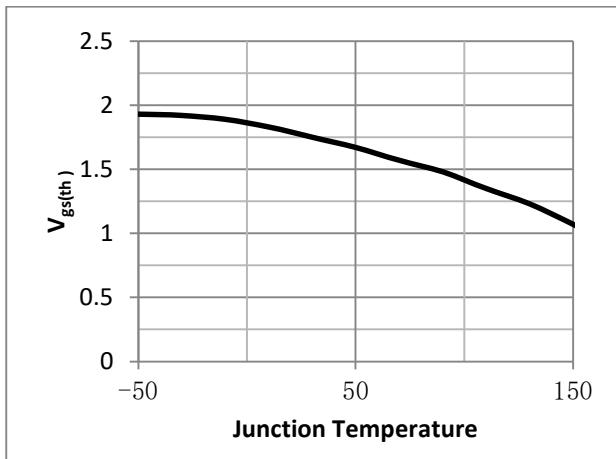


Fig.4 Resistance V.S Drain Current

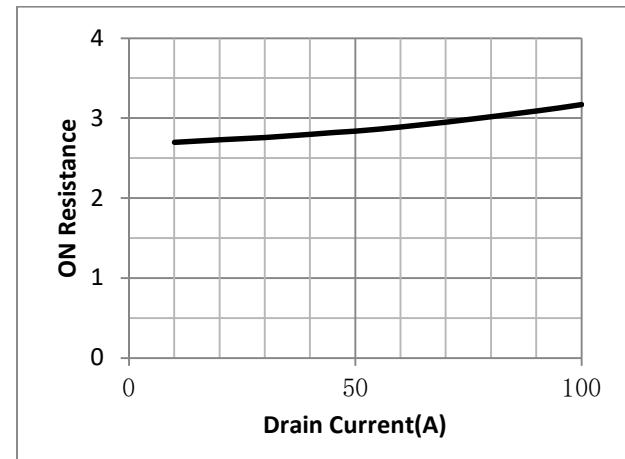


Fig.5 On-Resistance VS Gate Source Voltage

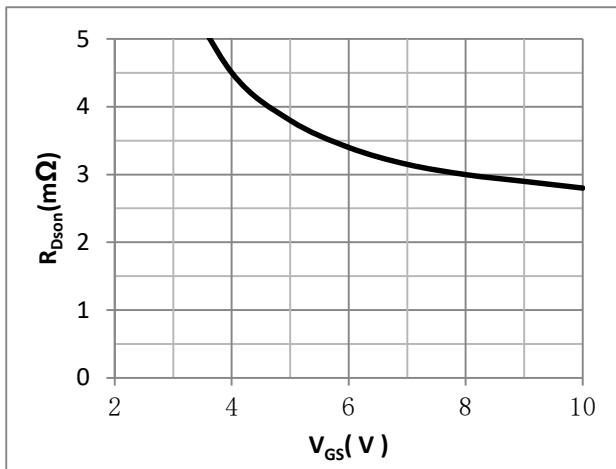


Fig.6 On-Resistance V.S Junction Temperature

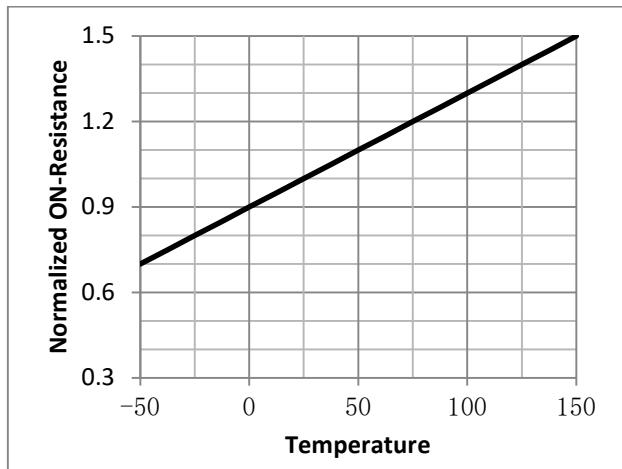




Fig.7 Gate Charge Measurement Circuit

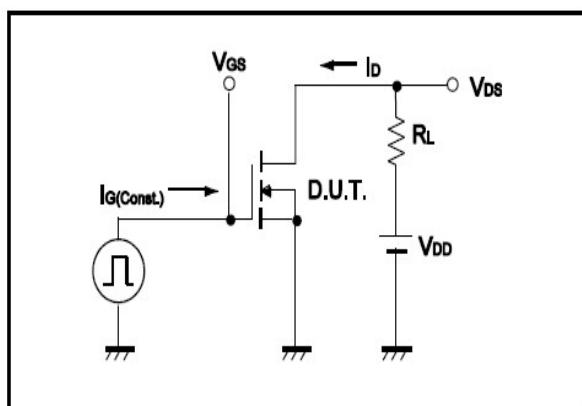


Fig.8 Gate Charge Waveform

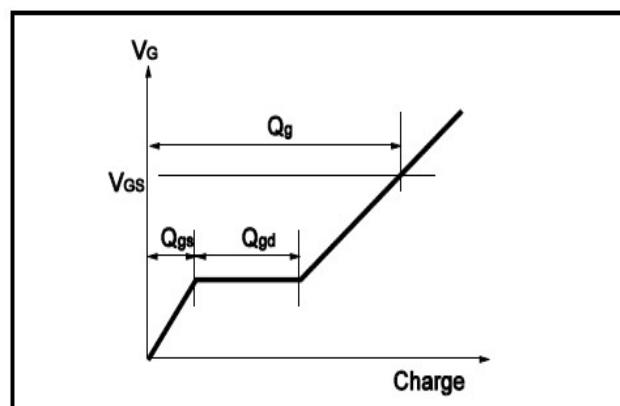


Fig.9 Switching Time Measurement Circuit

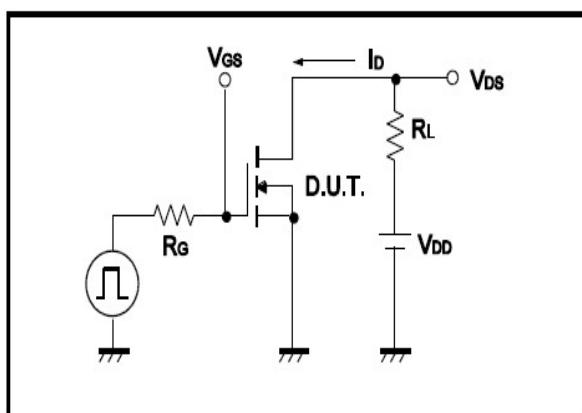


Fig.10 Switching Time Waveform

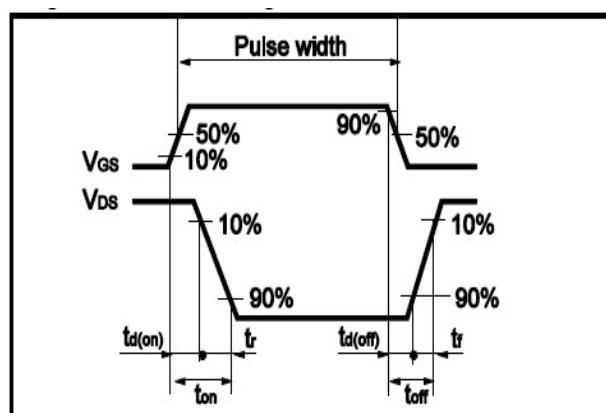


Fig.11 Avalanche Measurement Circuit


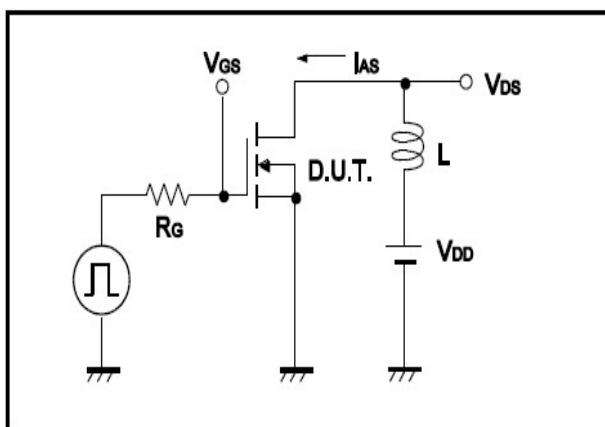


Fig.12 Avalanche Waveform



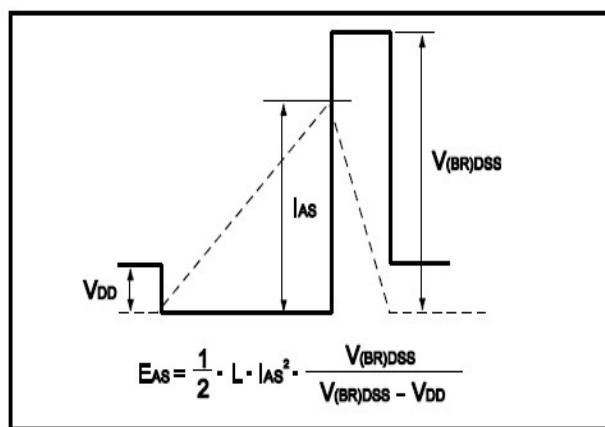

Dimensions (TO-220F)

Unit: mm

SYMBOL	min	nom	max	SYMBOL	min	nom	max
C	4.50	4.70	4.90	b1	2.90	3.40	3.90
c	0.40	0.50	0.6	a	1.08	1.28	1.48
A	9.96	10.16	10.36	a1	0.70	0.80	0.9
B	15.67	15.87	16.07	E	2.34	2.54	2.74
B1	3.30	3.40	3.50	E1	2.34	2.54	2.74
R	3.08	3.18	3.28	C1	2.34	2.54	2.74
b	12.48	12.98	13.48	C2	2.56	2.76	2.96

