

**• General Description**



The ZM040N06D combines advanced trench MOSFET technology with a low resistance package to provide extremely low  $R_{DS(ON)}$ .

**• Features**

- Advance high cell density Trench technology
- Low  $R_{DS(ON)}$  to minimize conductive loss
- Low Gate Charge for fast switching
- Low Thermal resistance

**• Application**

- SMPS 2<sup>nd</sup> Synchronous Rectifier
- BLDC Motor driver

**• Product Summary** $V_{DS} = 60V$  $R_{DS(ON)} = 4.6m\Omega$  $I_D = 90A$ 

TO-252

**• Ordering Information:**

Part NO.	ZM040N06D
Marking	ZM040N06
Packing Information	Reel Tape
Basic ordering unit (pcs)	2500

**• Absolute Maximum Ratings ( $T_c = 25^\circ C$ )**

Parameter	Symbol	Rating	Unit
Drain-Source Voltage	$V_{DS}$	60	V
Gate-Source Voltage	$V_{GS}$	$\pm 20$	V
Continuous Drain Current	$I_D @ T_c = 25^\circ C$	90	A
	$I_D @ T_c = 75^\circ C$	68	A
	$I_D @ T_c = 100^\circ C$	57	A
Pulsed Drain Current <sup>①</sup>	$I_{DM}$	270	A
Total Power Dissipation( $T_c = 25^\circ C$ )	$P_D @ T_c = 25^\circ C$	60	W
Total Power Dissipation( $T_A = 25^\circ C$ )	$P_D @ T_A = 25^\circ C$	2.0	W
Operating Junction Temperature	$T_J$	-55 to 150	°C
Storage Temperature	$T_{STG}$	-55 to 150	°C

**•Thermal resistance**

Parameter	Symbol	Min.	Typ.	Max.	Unit
Thermal resistance, junction - case	R <sub>thJC</sub>	-	-	2.05	°C/W
Thermal resistance, junction - ambient	R <sub>thJA</sub>	-	-	62.5	°C/W
Soldering temperature, wavesoldering for 10s	T <sub>sold</sub>	-	-	265	°C

**•Electronic Characteristics**

Parameter	Symbol	Condition	Min.	Typ	Max.	Unit
Drain-Source Breakdown Voltage	BV <sub>DSS</sub>	V <sub>GS</sub> =0V, I <sub>D</sub> =250uA	60			V
Gate Threshold Voltage	V <sub>GS(TH)</sub>	V <sub>GS</sub> =V <sub>DS</sub> , I <sub>D</sub> =250uA	1.3		2.5	V
Drain-Source Leakage Current	I <sub>DSS</sub>	V <sub>DS</sub> =60V, V <sub>GS</sub> =0V			1.0	uA
Gate- Source Leakage Current	I <sub>GSS</sub>	V <sub>GS</sub> =±20V ,V <sub>DS</sub> =0V			±100	nA
Static Drain-source On Resistance	R <sub>DS(ON)</sub>	V <sub>GS</sub> =10V, I <sub>D</sub> =16A		4.6	6	mΩ
		V <sub>GS</sub> =4.5V, I <sub>D</sub> =10A		6.0	7.5	mΩ
Forward Transconductance	g <sub>Fs</sub>	V <sub>DS</sub> =25V, I <sub>D</sub> =5A		32		s
Source-drain voltage	V <sub>SD</sub>	I <sub>S</sub> =16A		0.8	1.2	V

**•Electronic Characteristics**

Parameter	Symbol	Condition	Min.	Typ	Max.	Unit
Input capacitance	C <sub>iss</sub>	f = 1MHz V <sub>DS</sub> =25V	-	5300	-	pF
Output capacitance	C <sub>oss</sub>		-	450	-	
Reverse transfer capacitance	C <sub>rss</sub>		-	280	-	

**•Gate Charge characteristics(T<sub>a</sub> = 25°C)**

Parameter	Symbol	Condition	Min.	Typ	Max.	Unit
Total gate charge	Q <sub>g</sub>	VDD = 25V ID = 20A VGS = 10V	-	72	-	nC
Gate - Source charge	Q <sub>gs</sub>		-	18	-	
Gate - Drain charge	Q <sub>gd</sub>		-	21	-	

Note: ① Pulse Test : Pulse width ≤ 300μs, Duty cycle ≤ 2% ;



Fig.1 Gate-Charge Characteristics

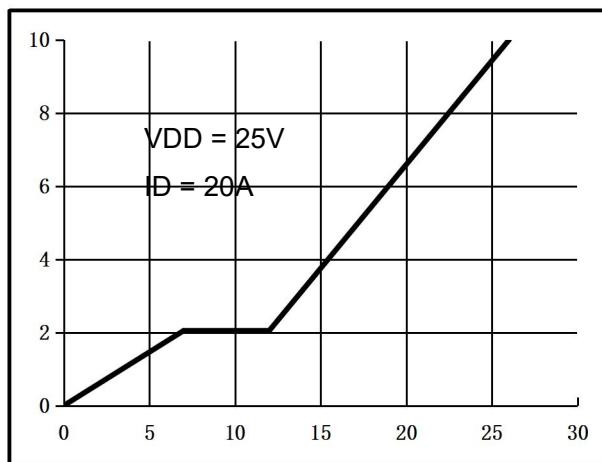


Fig.2 Capacitance Characteristics

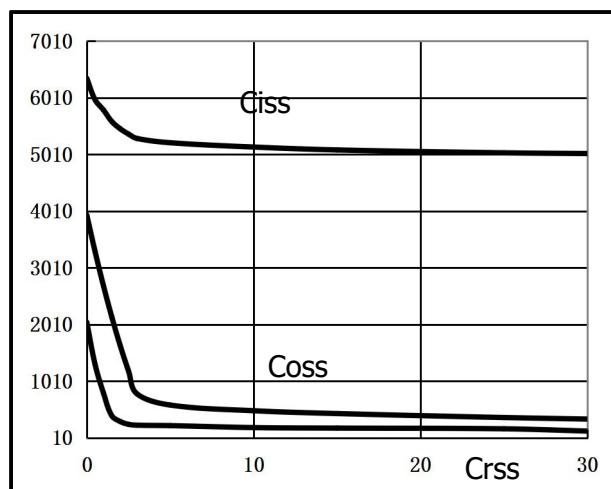


Fig.3 Power Dissipation

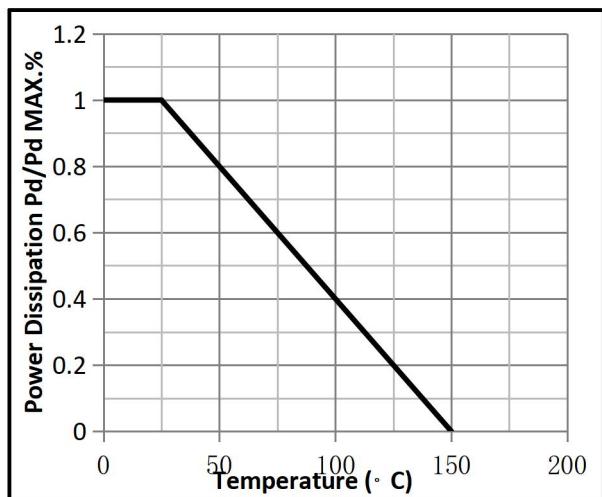


Fig.4 Typical output Characteristics

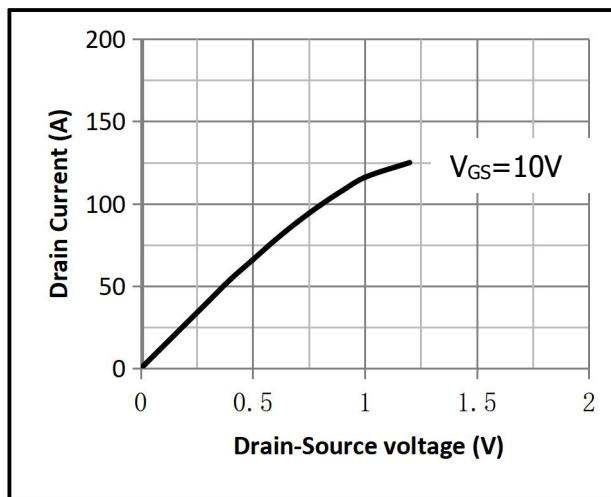


Fig.5 Threshold Voltage V.S Junction Temperature

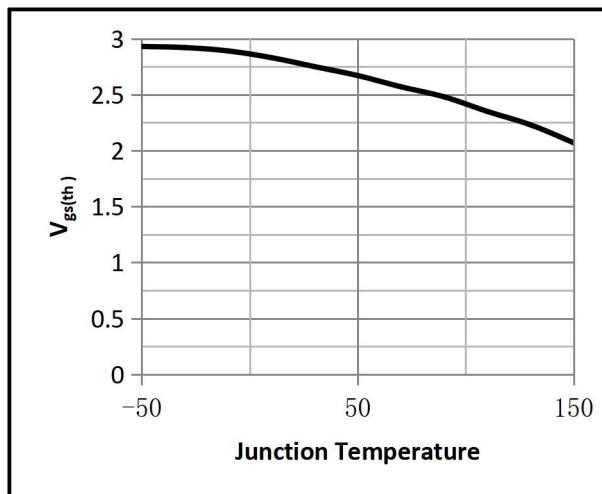


Fig.6 Resistance V.S Drain Current

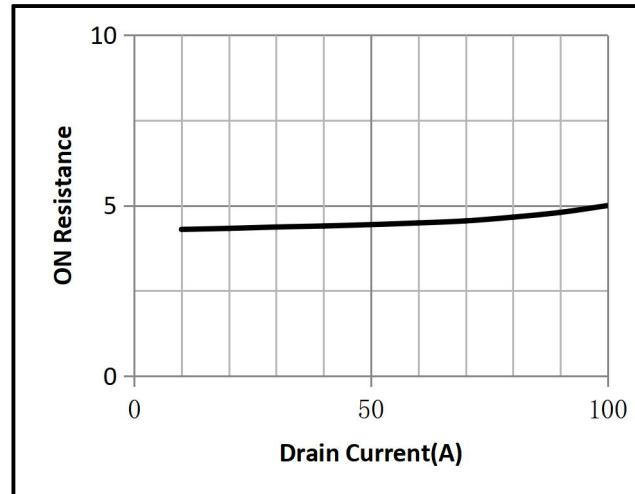




Fig.7 On-Resistance VS Gate Source Voltage

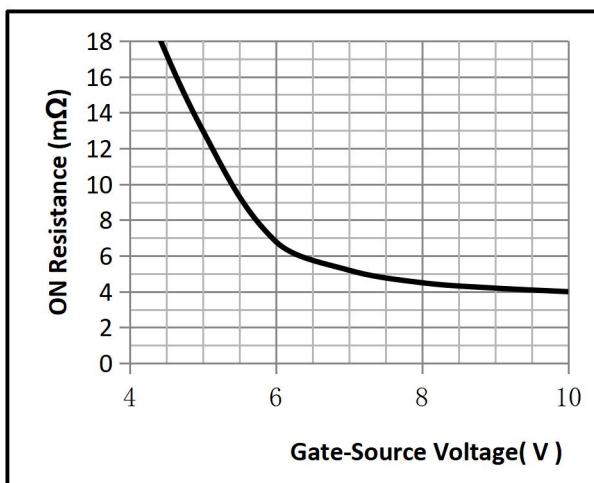


Fig.8 On-Resistance V.S Junction Temperature

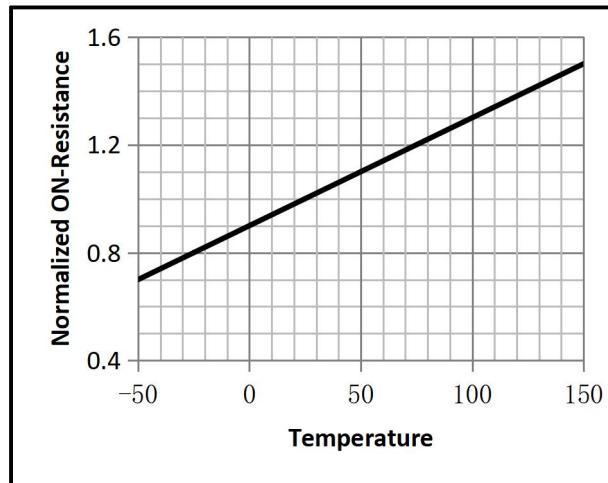


Fig.9 Switching Time Measurement Circuit

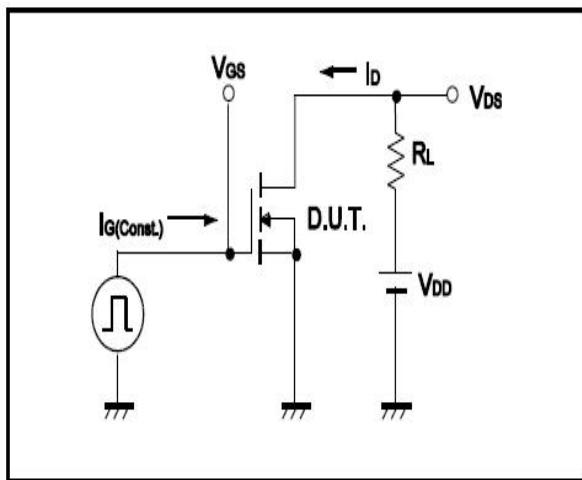


Fig.10 Gate Charge Waveform

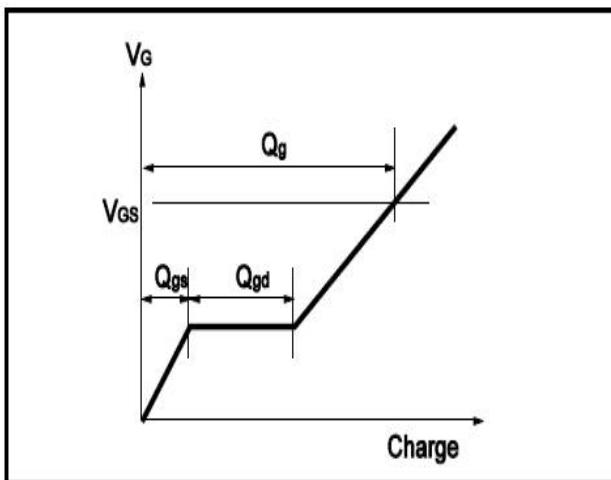


Fig.11 Switching Time Measurement Circuit


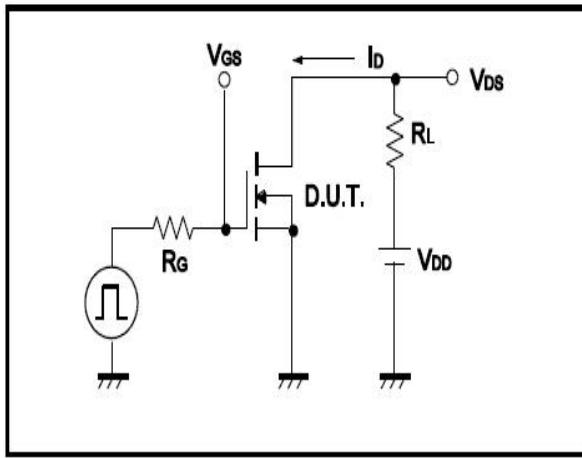


Fig.12 Gate Charge Waveform



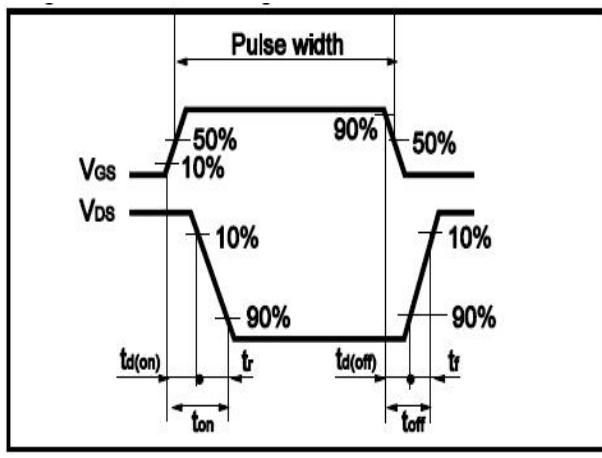

Unit: mm

SYMBOL	min	max	SYMBOL	min	max
A	2.10	2.50	B	0.85	1.25
b	0.50	0.80	b1	0.50	0.90
b2	0.45	0.70	C	0.45	0.70
D	6.30	6.75	D1	5.10	5.50
E	5.30	6.30	e1	2.25	2.35
L1	9.20	10.60	e2	4.45	4.75
L2	0.90	1.75	L3	0.60	1.10
K	0.00	0.23			

