



General Description

The ZM027N03N combines advanced trench MOSFET technology with a low resistance package to provide extremely low $R_{DS(ON)}$. This device is ideal for switch and battery protection applications.


Features

- Advance high cell density Trench technology
- Low $R_{DS(ON)}$ to minimize conductive loss
- Low Gate Charge for fast switching
- Low Thermal resistance
- Wettable Flanks

Application

- MB/VGA Vcore
- SMPS 2nd Synchronous Rectifier
- POL application
- BLDC Motor driver


Product Summary



$V_{DS} = 30V$

$R_{DS(ON)} = 2.7m\Omega$

$I_D = 95A$

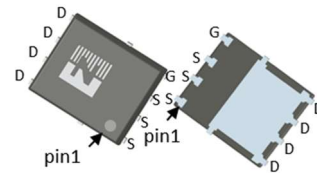

DFN5 x 6

Ordering Information:

Part NO.	ZM027N03N
Marking	ZM027N03
Packing Information	REEL TAPE
Basic ordering unit (pcs)	3000

Absolute Maximum Ratings (T_C =25°C)

Parameter	Symbol	Rating	Unit
Drain-Source Voltage	V_{DS}	30	V
Gate-Source Voltage	V_{GS}	±20	V
Continuous Drain Current	$I_{D@T_C=25^\circ C}$	95	A
	$I_{D@T_C=75^\circ C}$	72	A
	$I_{D@T_C=100^\circ C}$	60	A
	$I_{D@T_A=25^\circ C}$	32	A
	$I_{D@T_A=70^\circ C}$	26	A
Pulsed Drain Current ^①	I_{DM}	220	A
Total Power Dissipation	$P_D@T_C=25^\circ C$	70	W
Total Power Dissipation	$P_D@T_A=25^\circ C$	2.8	W
Operating Junction Temperature	T_J	-55 to 150	°C
Storage Temperature	T_{STG}	-55 to 150	°C



Single Pulse Avalanche Energy (L=0.5mH,VGS=10V,Rg=25Ω,TJ=25°C)	E_{AS}	350	mJ
Single Pulse Avalanche Energy (L=0.1mH,VGS=10V,Rg=25Ω,TJ=25°C)	E_{AS}	180	mJ

•Thermal resistance

Parameter	Symbol	Min.	Typ.	Max.	Unit
Thermal resistance, junction - case	R_{thJC}	-	-	1.8	° C/W
Thermal resistance, junction - ambient	R_{thJA}	-	-	45	° C/W
Soldering temperature, wave soldering for 10s	T_{sold}	-	-	265	° C

•Electronic Characteristics

Parameter	Symbol	Condition	Min.	Typ	Max.	Unit
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{GS} = 0V, I_D = 250\mu A$	30			V
Gate Threshold Voltage	$V_{GS(TH)}$	$V_{GS} = V_{DS}, I_D = 250\mu A$	1.5		2.5	V
Drain-Source Leakage Current	I_{DSS}	$V_{DS} = 30V, V_{GS} = 0V$			1.0	μA
Gate- Source Leakage Current	I_{GSS}	$V_{GS} = \pm 20V, V_{DS} = 0V$			± 100	nA
Static Drain-source On Resistance	$R_{DS(ON)}$	$V_{GS} = 10V, I_D = 24A$		2.7	3.6	mΩ
		$V_{GS} = 4.5V, I_D = 12A$		4.0	5.5	mΩ
Forward Transconductance	g_{FS}	$V_{DS} = 25V, I_D = 10A$		30		s
Source-drain voltage	V_{SD}	$I_s = 24A$			1.28	V

•Dynamic Characteristics

Parameter	Symbol	Condition	Min.	Typ	Max.	Unit
Input capacitance	C_{iss}	$f = 1MHz,$ $V_{DS} = 25V$	-	2800	-	pF
Output capacitance	C_{oss}		-	420	-	
Reverse transfer capacitance	C_{rss}		-	280	-	
Gate Resistance	R_g	$f = 1MHz$		2.5		Ω
Total gate charge	Q_g	$V_{DD} = 15V$ $I_D = 24A$ $V_{GS} = 10V$	-	27	-	nC
Gate - Source charge	Q_{gs}		-	8.6	-	
Gate - Drain charge	Q_{gd}		-	13.8	-	
Turn-ON Delay time	$t_{D(on)}$	$V_{GS} = 10V,$		12		ns



Turn-ON Rise time	t_r	$V_{DS}=15V$ $R_G = 3.3\Omega,$ $I_D = 15A$	44	ns
Turn-Off Delay time	$t_{D(off)}$		50	ns
Turn-Off Fall time	t_f		15	ns
Reverse Recovery Time	t_{RR}	$V_{DD} = 20 V,$ $dIS/dt = 100 A/s,$ $IS = 30 A$	5.8	ns
Charge Time	t_a		3.4	ns
Discharge Time	t_b		2.4	ns
Reverse Recovery Charge	Q_{RR}		1.6	nC

Note: ① Pulse Test : Pulse width $\leq 300\mu s$, Duty cycle $\leq 2\%$;

Fig.1 Power Dissipation

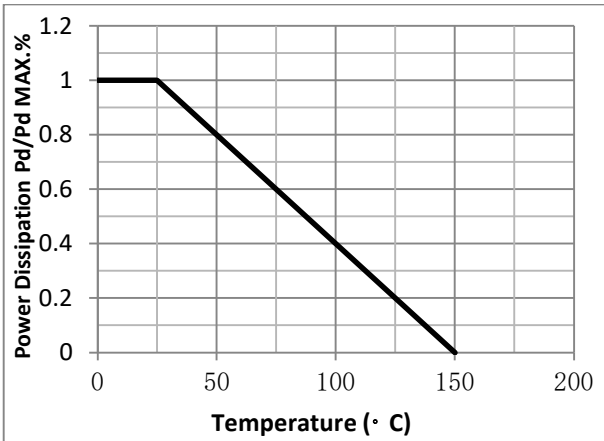


Fig.2 Typical output Characteristics

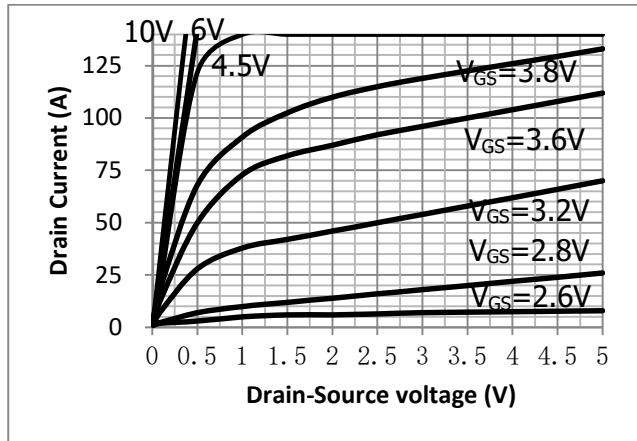


Fig.3 Threshold Voltage V.S Junction Temperature

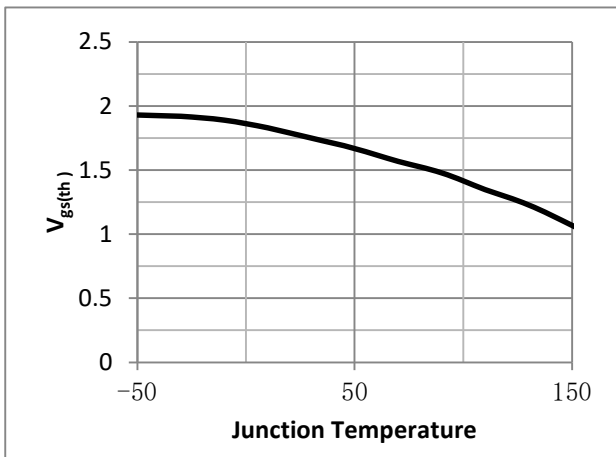


Fig.4 Resistance V.S Drain Current

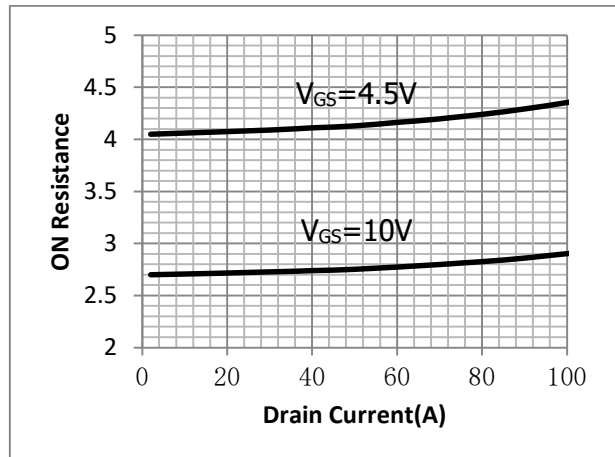




Fig.5 On-Resistance VS Gate Source Voltage

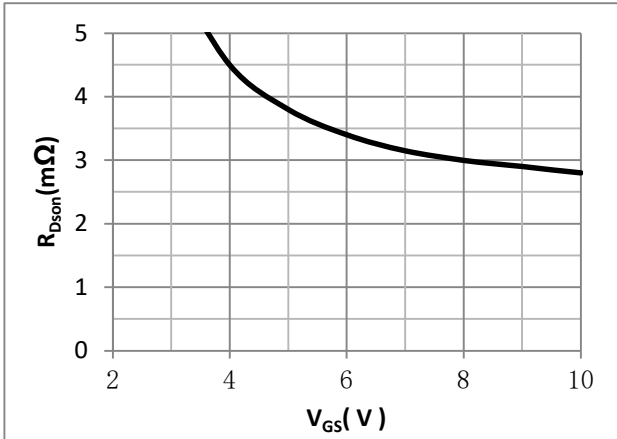


Fig.6 On-Resistance V.S Junction Temperature

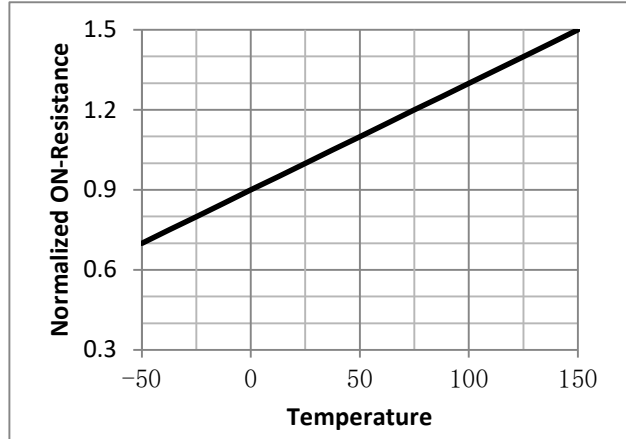


Fig.7 SOA Maximum Safe Operating Area

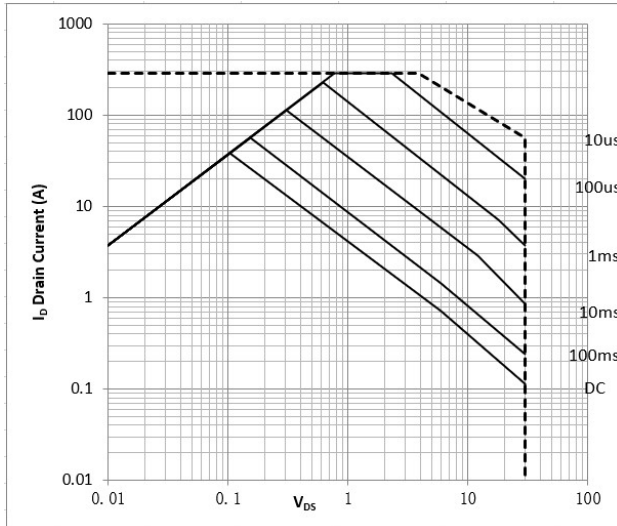


Fig.8 ID-Junction Temperature

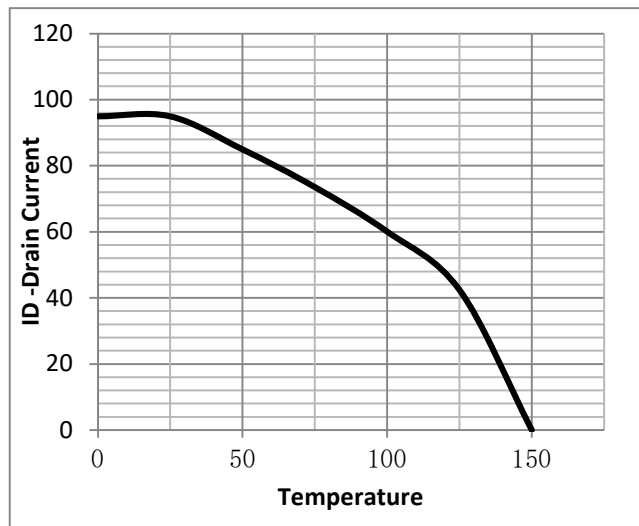


Figure 9. Diode Forward Voltage vs. Current

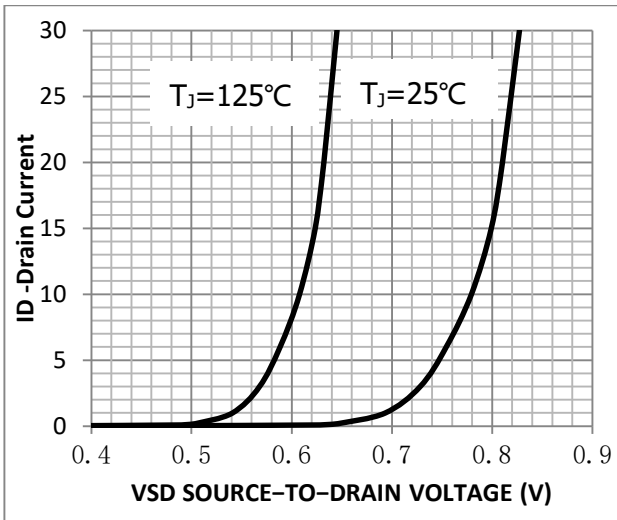


Figure 10. Transfer Characteristics

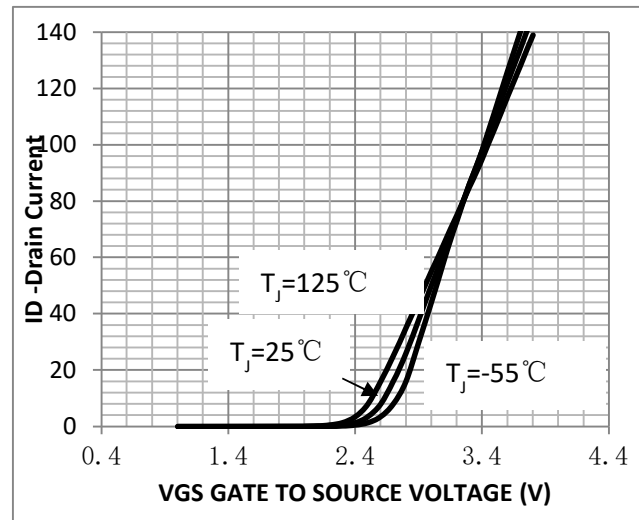


Figure 11. Gate-to-Source and Drain-to-Source Voltage vs. Total Charge

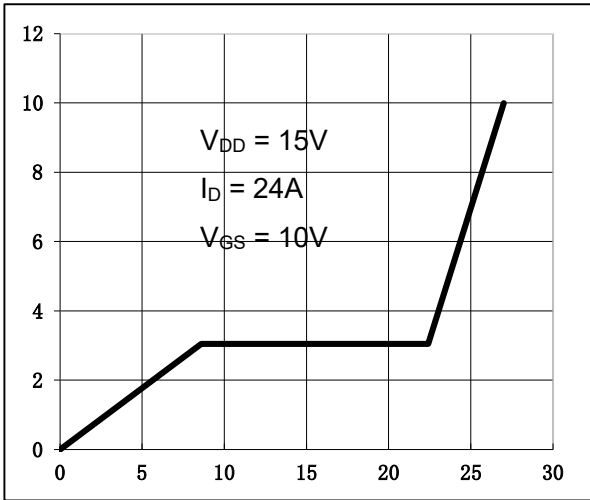


Fig.12 Capacitance Variation

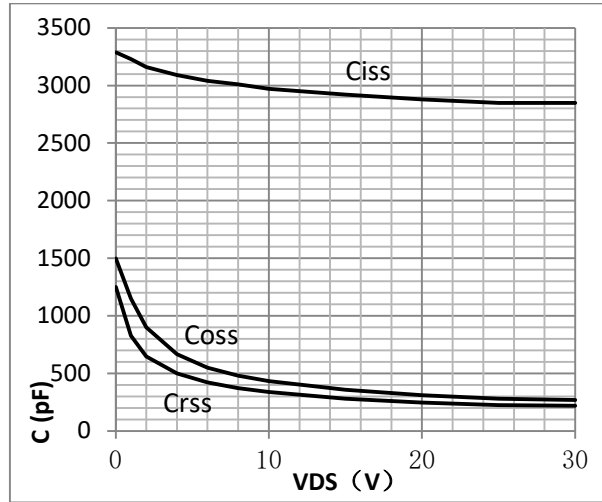


Fig.13 Normalized Maximum Transient Thermal Impedance

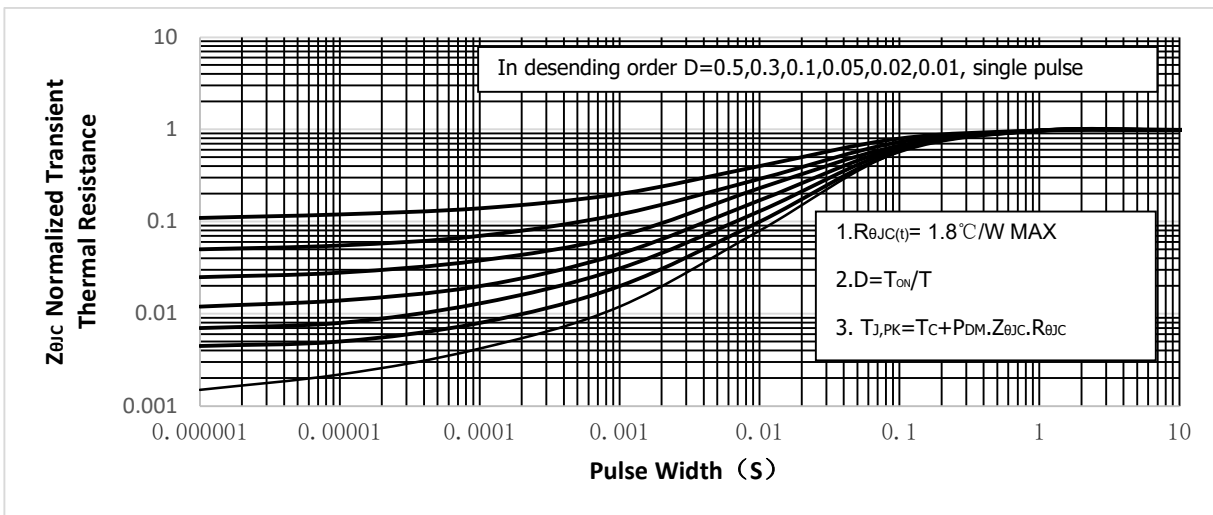


Fig.14 Switching Time Measurement Circuit

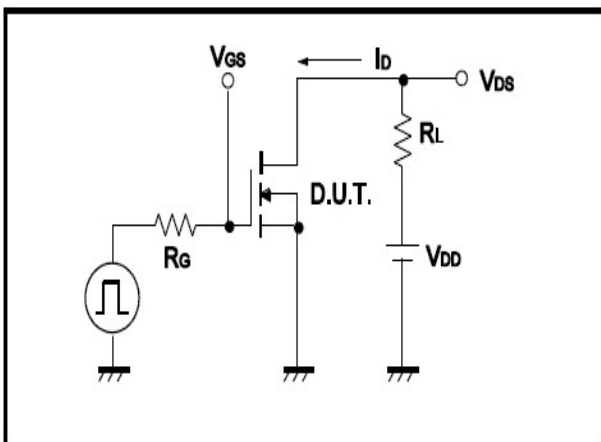


Fig.15 Gate Charge Measurement Circuit

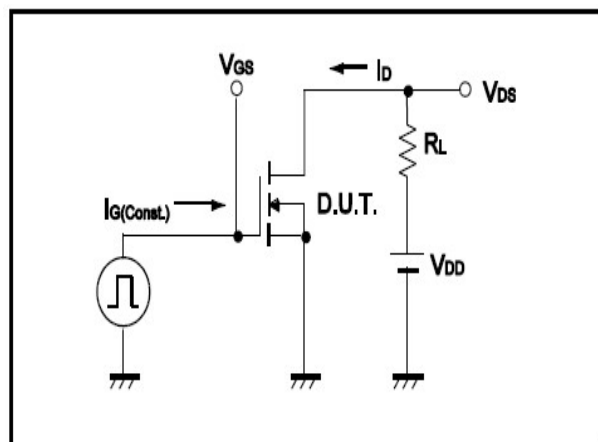




Fig.16 Avalanche Measurement Circuit

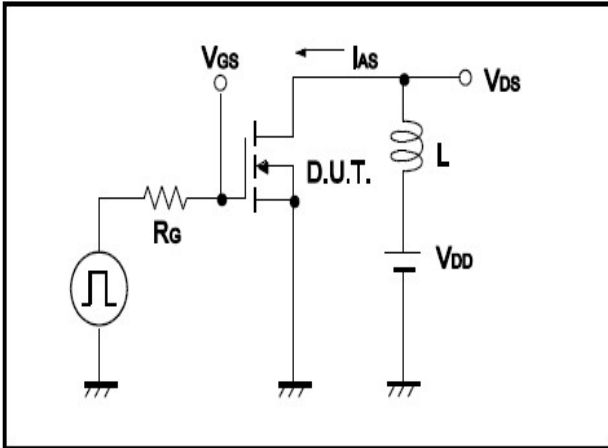


Fig.17 Avalanche Waveform


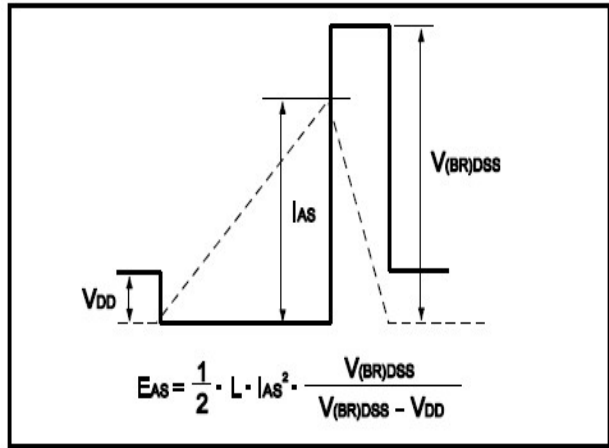



Fig.18 Switching Time Waveform



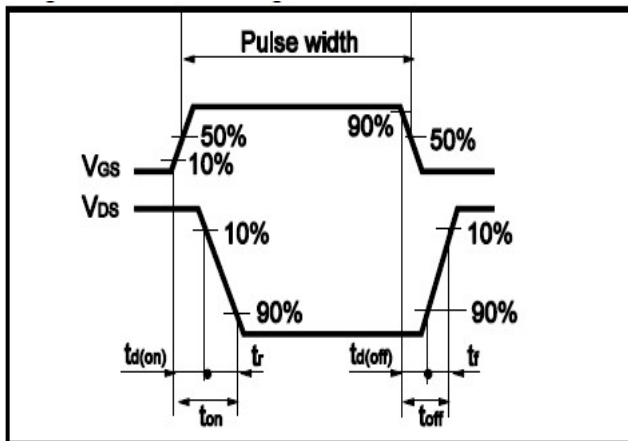

•Dimensions (DFN5×6)

Unit: mm

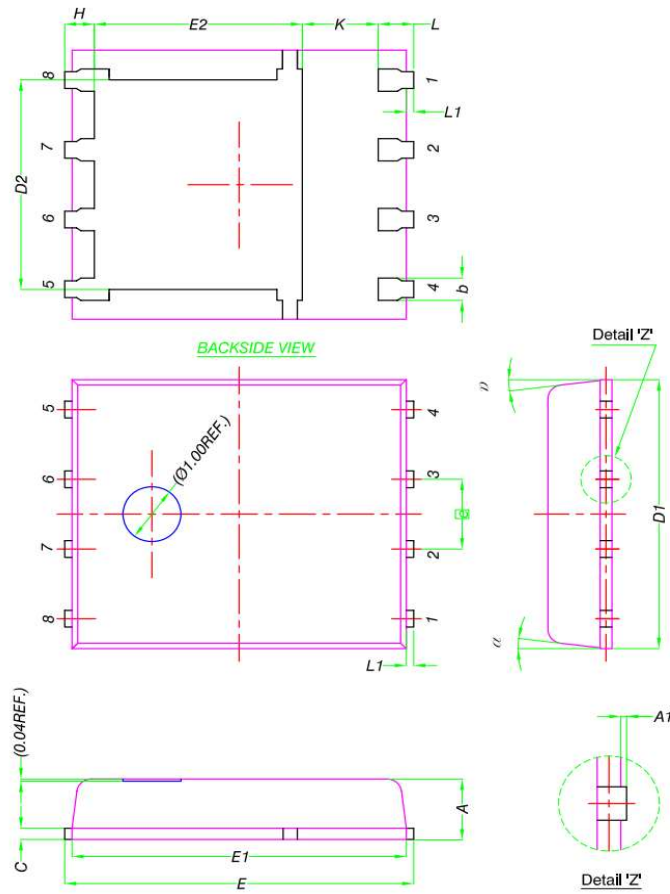

DIM.	MILLIMETERS		
	MIN.	NOM.	MAX.
A	0.90	1.00	1.10
A1	0	-	0.05
b	0.33	0.41	0.51
C	0.20	0.25	0.30
D1	4.80	4.90	5.00
D2	3.61	3.81	3.96
E	5.90	6.00	6.10
E1	5.70	5.75	5.80
E2	3.38	3.58	3.78
e	1.27 BSC		
H	0.41	0.51	0.61
K	1.10	-	-
L	0.51	0.61	0.71
L1	0.06	0.13	0.20
α	0°	-	12°